


FOIL & FOIL DISC

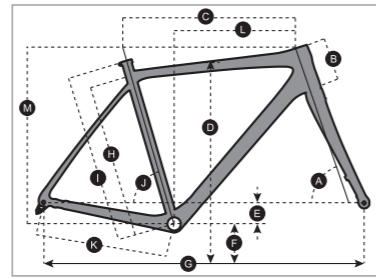

ADDICT RC DISC

FOIL DISC: PREMIUM, 10, 20


	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	110.0 mm 4.3 in	115.0 mm 4.5 in	130.0 mm 5.1 in	150.0 mm 5.9 in	170.0 mm 6.7 in
C TOP TUBE HORIZONTAL	510.0 mm 20.1 in	520.0 mm 20.5 in	535.0 mm 21.1 in	550.0 mm 21.7 in	565.0 mm 22.2 in
D STANDOVER HEIGHT	715.9 mm 28.2 in	729.4 mm 28.7 in	753.6 mm 29.7 in	773.5 mm 30.5 in	798.8 mm 31.4 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in
G WHEEL BASE	980.0 mm 38.6 in	986.0 mm 38.8 in	988.0 mm 38.9 in	995.0 mm 39.2 in	1,004.2 mm 39.5 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
I BB CENTER TO TOP OF SEATTUBE	470.0 mm 18.5 in	490.0 mm 19.3 in	520.0 mm 20.5 in	540.0 mm 21.3 in	560.0 mm 22.0 in
J SEAT ANGLE	74.5°	74.5°	74.0°	73.6°	73.3°
K CHAINSTAY	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in
L REACH	370.6 mm 14.6 in	378.8 mm 14.9 in	384.0 mm 15.1 in	388.9 mm 15.3 in	394.5 mm 15.5 in
M STACK	502.6 mm 19.8 in	509.0 mm 20.0 in	526.7 mm 20.7 in	547.5 mm 21.6 in	568.3 mm 22.4 in

FOIL: RC, 10, 20, 30


	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	110.0 mm 4.3 in	115.0 mm 4.5 in	130.0 mm 5.1 in	150.0 mm 5.9 in	170.0 mm 6.7 in
C TOP TUBE HORIZONTAL	510.0 mm 20.1 in	520.0 mm 20.5 in	535.0 mm 21.1 in	550.0 mm 21.7 in	565.0 mm 22.2 in
D STANDOVER HEIGHT	715.9 mm 28.2 in	729.4 mm 28.7 in	753.6 mm 29.7 in	773.5 mm 30.5 in	798.8 mm 31.4 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in
G WHEEL BASE	972.0 mm 38.3 in	978.0 mm 38.5 in	980.0 mm 38.6 in	987.0 mm 38.9 in	994.2 mm 39.1 in
H BB CENTER TO TOPTUBE CENTER	400.0 mm 15.7 in	420.0 mm 16.5 in	450.0 mm 17.7 in	470.0 mm 18.5 in	490.0 mm 19.3 in
I BB CENTER TO TOP OF SEATTUBE	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
J SEAT ANGLE	74.5°	74.5°	74.0°	73.6°	73.3°
K CHAINSTAY	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in
L REACH	370.6 mm 14.6 in	378.8 mm 14.9 in	384.0 mm 15.1 in	388.9 mm 15.3 in	394.5 mm 15.5 in
M STACK	502.6 mm 19.8 in	509.0 mm 20.0 in	526.7 mm 20.7 in	547.5 mm 21.6 in	568.3 mm 22.4 in

ADDICT RC DISC: ULTIMATE, PREMIUM, 15, 20

	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	100.0 mm 3.9 in	105.0 mm 4.1 in	120.0 mm 4.7 in	140.0 mm 5.5 in	160.0 mm 6.3 in
C TOP TUBE HORIZONTAL	510.0 mm 20.1 in	520.0 mm 20.5 in	535.0 mm 21.1 in	550.0 mm 21.7 in	565.0 mm 22.2 in
D STANDOVER HEIGHT	721.8 mm 28.4 in	734.7 mm 28.9 in	757.4 mm 29.8 in	777.0 mm 30.6 in	796.6 mm 31.4 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in
G WHEEL BASE	977.1 mm 38.5 in	983.1 mm 38.7 in	985.1 mm 38.8 in	992.0 mm 39.1 in	999.3 mm 39.3 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
I BB CENTER TO TOP OF SEATTUBE	455.0 mm 17.9 in	475.0 mm 18.7 in	505.0 mm 19.9 in	525.0 mm 20.7 in	545.0 mm 21.5 in
J SEAT ANGLE	74.5°	74.5°	74.0°	73.6°	73.3°
K CHAINSTAY	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in
L REACH	370.6 mm 14.6 in	378.8 mm 14.9 in	384.0 mm 15.1 in	388.9 mm 15.3 in	394.5 mm 15.5 in
M STACK	502.6 mm 19.8 in	509.0 mm 20.0 in	526.7 mm 20.7 in	547.5 mm 21.6 in	568.3 mm 22.4 in
N STEM LENGTH	80.0 mm 3.1 in	90.0 mm 3.5 in	100.0 mm 3.9 in	110.0 mm 4.3 in	110.0 mm 4.3 in
O TRAIL	72.3 mm 2.8 in	69.1 mm 2.7 in	62.8 mm 2.5 in	59.7 mm 2.4 in	56.6 mm 2.2 in

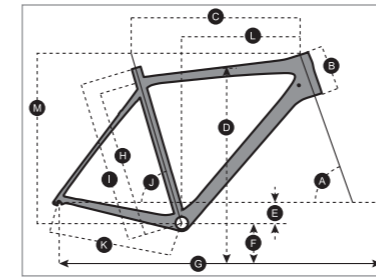

ADDICT RC

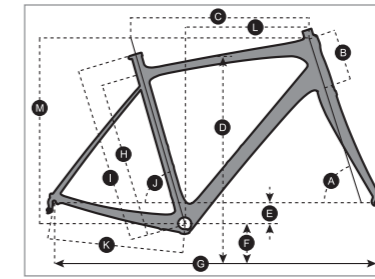

ADDICT & ADDICT DISC

ADDICT RC: PRO, 10, 20


	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	100.0 mm 3.9 in	105.0 mm 4.1 in	120.0 mm 4.7 in	140.0 mm 5.5 in	160.0 mm 6.3 in
C TOP TUBE HORIZONTAL	510.0 mm 20.1 in	520.0 mm 20.5 in	535.0 mm 21.1 in	550.0 mm 21.7 in	565.0 mm 22.2 in
D STANDOVER HEIGHT	721.8 mm 28.4 in	734.7 mm 28.9 in	757.4 mm 29.8 in	777.0 mm 30.6 in	796.6 mm 31.4 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in
G WHEEL BASE	972.0 mm 38.3 in	978.0 mm 38.5 in	980.1 mm 38.6 in	987.0 mm 38.9 in	994.2 mm 39.1 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
I BB CENTER TO TOP OF SEATTUBE	455.0 mm 17.9 in	475.0 mm 18.7 in	505.0 mm 19.9 in	525.0 mm 20.7 in	545.0 mm 21.5 in
J SEAT ANGLE	74.5°	74.5°	74.0°	73.6°	73.3°
K CHAINSTAY	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in
L REACH	370.6 mm 14.6 in	378.8 mm 14.9 in	384.0 mm 15.1 in	388.9 mm 15.3 in	394.5 mm 15.5 in
M STACK	502.6 mm 19.8 in	509.0 mm 20.0 in	526.7 mm 20.7 in	547.5 mm 21.6 in	568.3 mm 22.4 in
N STEM LENGTH	80.0 mm 3.1 in	90.0 mm 3.5 in	100.0 mm 3.9 in	110.0 mm 4.3 in	110.0 mm 4.3 in

ADDICT DISC: 10, 20, 30


	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	115.0 mm 4.5 in	125.0 mm 4.9 in	145.0 mm 5.7 in	165.0 mm 6.5 in	185.0 mm 7.3 in
C TOP TUBE HORIZONTAL	505.0 mm 19.9 in	515.0 mm 20.3 in	530.0 mm 20.9 in	545.0 mm 21.5 in	560.0 mm 22.0 in
D STANDOVER HEIGHT	725.3 mm 28.6 in	741.1 mm 29.2 in	767.5 mm 30.2 in	787.5 mm 31.0 in	807.5 mm 31.8 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	280.2 mm 11.0 in	280.2 mm 11.0 in	280.2 mm 11.0 in	280.2 mm 11.0 in	280.2 mm 11.0 in
G WHEEL BASE	973.1 mm 38.3 in	979.4 mm 38.6 in	981.2 mm 38.6 in	986.8 mm 38.9 in	991.6 mm 39.0 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
I BB CENTER TO TOP OF SEATTUBE	470.0 mm 18.5 in	490.0 mm 19.3 in	520.0 mm 20.5 in	540.0 mm 21.3 in	560.0 mm 22.0 in
J SEAT ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°
K CHAINSTAY	415.0 mm 16.3 in	415.0 mm 16.3 in	415.0 mm 16.3 in	415.0 mm 16.3 in	415.0 mm 16.3 in
L REACH	366.6 mm 14.4 in	373.5 mm 14.7 in	377.3 mm 14.9 in	381.2 mm 15.0 in	384.6 mm 15.1 in
M STACK	516.7 mm 20.3 in	527.9 mm 20.8 in	550.5 mm 21.7 in	571.3 mm 22.5 in	592.3 mm 23.3 in
N STEM LENGTH					

ADDICT: 10, 20, 30


	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	115.0 mm 4.5 in	125.0 mm 4.9 in	145.0 mm 5.7 in	165.0 mm 6.5 in	185.0 mm 7.3 in
C TOP TUBE HORIZONTAL	505.0 mm 19.9 in	515.0 mm 20.3 in	530.0 mm 20.9 in	545.0 mm 21.5 in	560.0 mm 22.0 in
D STANDOVER HEIGHT	725.3 mm 28.6 in	741.1 mm 29.2 in	767.5 mm 30.2 in	787.5 mm 31.0 in	807.5 mm 31.8 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	280.2 mm 11.0 in	280.2 mm 11.0 in	280.2 mm 11.0 in	280.2 mm 11.0 in	280.2 mm 11.0 in
G WHEEL BASE	973.1 mm 38.3 in	979.4 mm 38.6 in	981.2 mm 38.6 in	986.8 mm 38.9 in	991.6 mm 39.0 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
I BB CENTER TO TOP OF SEATTUBE	470.0 mm 18.5 in	490.0 mm 19.3 in	520.0 mm 20.5 in	540.0 mm 21.3 in	560.0 mm 22.0 in
J SEAT ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°
K CHAINSTAY	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in	410.0 mm 16.1 in
L REACH	366.6 mm 14.4 in	373.5 mm 14.7 in	377.3 mm 14.9 in	381.2 mm 15.0 in	384.6 mm 15.1 in
M STACK	516.7 mm 20.3 in	527.9 mm 20.8 in	550.5 mm 21.7 in	571.3 mm 22.5 in	592.3 mm 23.3 in
N STEM LENGTH					

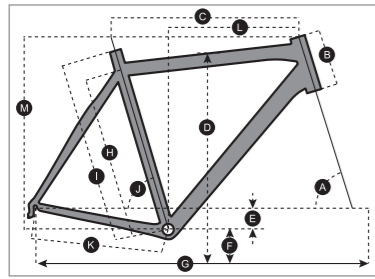


SPEEDSTER

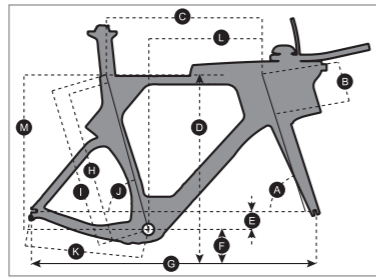


PLASMA: PREMIUM, RC

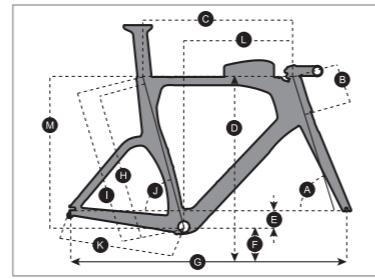

PLASMA: 10, 20

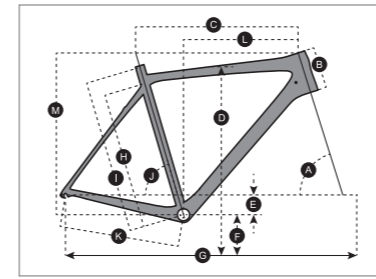

ADDICT CX

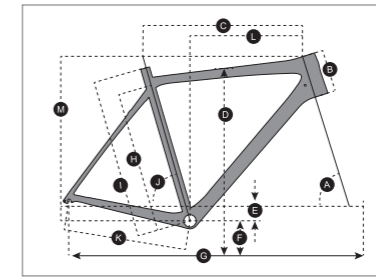

SPEEDSTER CX

SPEEDSTER: SE, 10, 20, 30, 40

	XXS/47	XS/49	S/52	M/54	L/56
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°	72.5°	73.0°
B HEAD TUBE LENGTH	111.0 mm 4.4 in	121.0 mm 4.8 in	141.0 mm 5.6 in	161.0 mm 6.3 in	181.0 mm 7.1 in
C TOP TUBE HORIZONTAL	505.0 mm 19.9 in	515.0 mm 20.3 in	530.0 mm 20.9 in	545.0 mm 21.5 in	560.0 mm 22.0 in
D STANDOVER HEIGHT	725.3 mm 28.6 in	741.1 mm 29.2 in	767.5 mm 30.2 in	787.5 mm 31.0 in	807.5 mm 31.8 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	282.0 mm 11.1 in	282.0 mm 11.1 in	282.0 mm 11.1 in	282.0 mm 11.1 in	282.0 mm 11.1 in
G WHEEL BASE	973.1 mm 38.3 in	979.4 mm 38.6 in	981.2 mm 38.6 in	986.8 mm 38.9 in	991.6 mm 39.0 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in	430.0 mm 16.9 in	460.0 mm 18.1 in	480.0 mm 18.9 in	500.0 mm 19.7 in
I BB CENTER TO TOP OF SEATTUBE	470.0 mm 18.5 in	490.0 mm 19.3 in	520.0 mm 20.5 in	540.0 mm 21.3 in	560.0 mm 22.0 in
J SEAT ANGLE	75.0°	75.0°	74.5°	74.0°	73.5°
K CHAINSTAY	415.0 mm 16.3 in	415.0 mm 16.3 in	415.0 mm 16.3 in	415.0 mm 16.3 in	415.0 mm 16.3 in
L REACH	366.6 mm 14.4 in	373.5 mm 14.7 in	377.3 mm 14.9 in	381.2 mm 15.0 in	384.6 mm 15.1 in
M STACK	516.7 mm 20.3 in	527.9 mm 20.8 in	550.5 mm 21.7 in	571.3 mm 22.5 in	592.3 mm 23.3 in
N STEM LENGTH					

ADDICT CX DISC: 10, 20

	XS/49	S/52	M/54	L/56	XL/58
A HEAD TUBE ANGLE	70.0°	70.0°	71.0°	71.0°	71.0°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	120.0 mm 4.7 in	140.0 mm 5.5 in	160.0 mm 6.3 in	180.0 mm 7.1 in
C TOP TUBE HORIZONTAL	505.0 mm 19.9 in	525.0 mm 20.7 in	545.0 mm 21.5 in	568.0 mm 22.4 in	590.0 mm 23.2 in
D STANDOVER HEIGHT	749.8 mm 29.5 in	775.7 mm 30.5 in	796.2 mm 31.3 in	814.1 mm 32.1 in	832.0 mm 32.8 in
E BB OFFSET	-68.0 mm -2.7 in	-68.0 mm -2.7 in	-68.0 mm -2.7 in	-68.0 mm -2.7 in	-68.0 mm -2.7 in
F BB HEIGHT	281.0 mm 11.1 in	281.0 mm 11.1 in	281.0 mm 11.1 in	281.0 mm 11.1 in	281.0 mm 11.1 in
G WHEEL BASE	984.0 mm 38.7 in	1,002.0 mm 39.4 in	1,017.0 mm 40.0 in	1,043.0 mm 41.1 in	1,056.0 mm 41.6 in
H BB CENTER TO TOPTUBE CENTER	431.5 mm 17.0 in	462.7 mm 18.2 in	483.0 mm 19.0 in	503.2 mm 19.8 in	523.3 mm 20.6 in
I BB CENTER TO TOP OF SEATTUBE	490.0 mm 19.3 in	520.0 mm 20.5 in	540.0 mm 21.3 in	560.0 mm 22.0 in	580.0 mm 22.8 in
J SEAT ANGLE	74.5°	74.0°	73.5°	73.0°	73.0°
K CHAINSTAY	422.0 mm 16.6 in	422.0 mm 16.6 in	422.0 mm 16.6 in	422.0 mm 16.6 in	422.0 mm 16.6 in
L REACH	360.0 mm 14.2 in	369.0 mm 14.5 in	378.0 mm 14.9 in	390.0 mm 15.4 in	405.0 mm 15.9 in
M STACK	521.8 mm 20.5 in	545.5 mm 21.5 in	564.4 mm 22.2 in	583.3 mm 23.0 in	602.2 mm 23.7 in
N STEM LENGTH	90.0 mm 3.5 in	100.0 mm 3.9 in	110.0 mm 4.3 in	120.0 mm 4.7 in	120.0 mm 4.7 in

PLASMA: PREMIUM, RC


	S/51	M/54	L/57
A HEAD TUBE ANGLE	72.0°	73.0°	73.0°
B HEAD TUBE LENGTH	110.0 mm 4.3 in	138.0 mm 5.4 in	170.0 mm 6.7 in
C TOP TUBE HORIZONTAL	524.0 mm 20.6 in	544.0 mm 21.4 in	564.0 mm 22.2 in
D STANDOVER HEIGHT	779.0 mm 30.7 in	809.0 mm 31.9 in	839.0 mm 33.0 in
E BB OFFSET	-65.0 mm -2.6 in	-65.0 mm -2.6 in	-65.0 mm -2.6 in
F BB HEIGHT	269.0 mm 10.6 in	269.0 mm 10.6 in	269.0 mm 10.6 in
G WHEEL BASE	965.0 mm 38.0 in	983.0 mm 38.7 in	1,009.0 mm 39.7 in
H BB CENTER TO TOPTUBE CENTER	514.8 mm 20.3 in	544.6 mm 21.4 in	574.4 mm 22.6 in
I BB CENTER TO TOP OF SEATTUBE	529.8 mm 20.9 in	559.6 mm 22.0 in	589.4 mm 23.2 in
J SEAT ANGLE	74.0°	75.0°	75.0°
K CHAINSTAY	403.0 mm 15.9 in	403.0 mm 15.9 in	403.0 mm 15.9 in
L REACH	380.0 mm 15.0 in	397.0 mm 15.6 in	414.0 mm 16.3 in
M STACK	510.0 mm 20.1 in	540.0 mm 21.3 in	570.0 mm 22.4 in
N STEM LENGTH	85.0 mm 3.3 in	85.0 mm 3.3 in	85.0 mm 3.3 in

SPEEDSTER CX


	XS/49	S/52	M/54	L/56	XL/58
A HEAD TUBE ANGLE	70.0°	70.0°	71.0°	71.0°	71.0°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	120.0 mm 4.7 in	140.0 mm 5.5 in	160.0 mm 6.3 in	180.0 mm 7.1 in
C TOP TUBE HORIZONTAL	505.0 mm 19.9 in	525.0 mm 20.7 in	545.0 mm 21.5 in	568.0 mm 22.4 in	590.0 mm 23.2 in
D STANDOVER HEIGHT	749.8 mm 29.5 in	775.7 mm 30.5 in	796.2 mm 31.3 in	814.1 mm 32.1 in	832.0 mm 32.8 in
E BB OFFSET	-68.0 mm -2.7 in	-68.0 mm -2.7 in	-68.0 mm -2.7 in	-68.0 mm -2.7 in	-68.0 mm -2.7 in
F BB HEIGHT	281.0 mm 11.1 in	281.0 mm 11.1 in	281.0 mm 11.1 in	281.0 mm 11.1 in	281.0 mm 11.1 in
G WHEEL BASE	984.0 mm 38.7 in	1,002.0 mm 39.4 in	1,017.0 mm 40.0 in	1,043.0 mm 41.1 in	1,056.0 mm 41.6 in
H BB CENTER TO TOPTUBE CENTER	431.5 mm 17.0 in	462.7 mm 18.2 in	483.0 mm 19.0 in	503.2 mm 19.8 in	523.3 mm 20.6 in
I BB CENTER TO TOP OF SEATTUBE	490.0 mm 19.3 in	520.0 mm 20.5 in	540.0 mm 21.3 in	560.0 mm 22.0 in	580.0 mm 22.8 in
J SEAT ANGLE	74.5°	74.0°	73.5°	73.0°	73.0°
K CHAINSTAY	422.0 mm 16.6 in	422.0 mm 16.6 in	422.0 mm 16.6 in	422.0 mm 16.6 in	422.0 mm 16.6 in
L REACH	360.0 mm 14.2 in	369.0 mm 14.5 in	378.0 mm 14.9 in	390.0 mm 15.4 in	405.0 mm 15.9 in
M STACK	521.8 mm 20.5 in	545.5 mm 21.5 in	564.4 mm 22.2 in	583.3 mm 23.0 in	602.2 mm 23.7 in
N STEM LENGTH	90.0 mm 3.5 in	100.0 mm 3.9 in	110.0 mm 4.3 in	120.0 mm 4.7 in	120.0 mm 4.7 in

PLASMA: 10, 20


	XS/49	S/51	M/54	L/57
A HEAD TUBE ANGLE	71.5°	72.0°	73.0°	73.0°
B HEAD TUBE LENGTH	85.0 mm 3.3 in	100.0 mm 3.9 in	128.0 mm 5.0 in	159.0 mm 6.3 in
C TOP TUBE HORIZONTAL	519.5 mm 20.5 in	526.0 mm 20.7 in	546.0 mm 21.5 in	566.0 mm 22.3 in
D STANDOVER HEIGHT	742.0 mm 29.2 in	769.0 mm 30.3 in	799.0 mm 31.5 in	829.0 mm 32.6 in
E BB OFFSET	-65.0 mm -2.6 in	-65.0 mm -2.6 in	-65.0 mm -2.6 in	-65.0 mm -2.6 in
F BB HEIGHT	269.0 mm 10.6 in	269.0 mm 10.6 in	269.0 mm 10.6 in	269.0 mm 10.6 in
G WHEEL BASE	959.8 mm 37.8 in	965.0 mm 38.0 in	983.0 mm 38.7 in	1,009.0 mm 39.7 in
H BB CENTER TO TOPTUBE CENTER	465.0 mm 18.3 in	504.9 mm 19.9 in	534.7 mm 21.0 in	564.4 mm 22.2 in
I BB CENTER TO TOP OF SEATTUBE	480.0 mm 18.9 in	519.9 mm 20.5 in	549.7 mm 21.6 in	579.4 mm 22.8 in
J SEAT ANGLE	74.0°	74.0°	75.0°	75.0°
K CHAINSTAY	403.0 mm 15.9 in	403.0 mm 15.9 in	403.0 mm 15.9 in	403.0 mm 15.9 in
L REACH	375.0 mm 14.8 in	383.0 mm 15.1 in	400.0 mm 15.7 in	417.0 mm 16.4 in
M STACK	485.0 mm 19.1 in	500.0 mm 19.7 in	530.0 mm 20.9 in	560.0 mm 22.0 in
N STEM LENGTH				

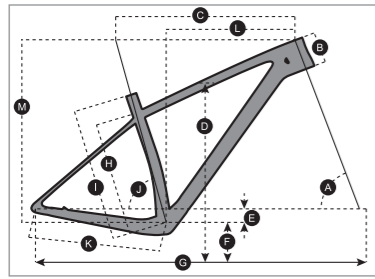


SCALE 900 SERIES

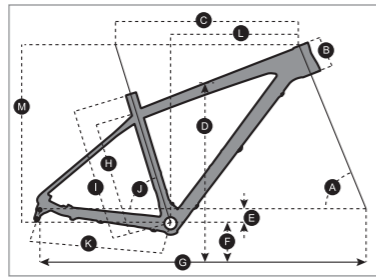

SCALE: 710, 720, 730

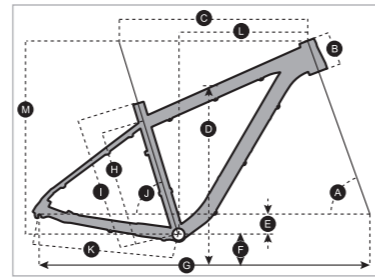

BIG JON

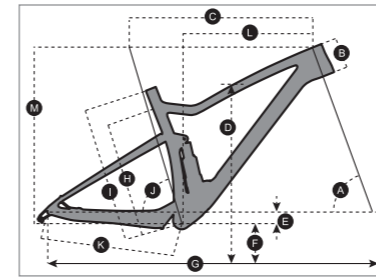

SPARK

SCALE 900 RC: SL, WORLD CUP, PRO
SCALE: 900 Elite, 920, 930

	S	M	L
A HEAD TUBE ANGLE	69.5°	69.5°	69.5°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	100.0 mm 3.9 in	115.0 mm 4.5 in
C TOP TUBE HORIZONTAL	575.0 mm 22.6 in	600.0 mm 23.6 in	625.0 mm 24.6 in
D STANDOVER HEIGHT	743.0 mm 29.3 in	774.0 mm 30.5 in	800.0 mm 31.5 in
E BB OFFSET	-58.0 mm -2.3 in	-58.0 mm -2.3 in	-58.0 mm -2.3 in
F BB HEIGHT	312.0 mm 12.3 in	312.0 mm 12.3 in	312.0 mm 12.3 in
G WHEEL BASE	1,076.4 mm 42.4 in	1,101.8 mm 43.4 in	1,127.9 mm 44.4 in
H BB CENTER TO TOPTUBE CENTER	325.0 mm 12.8 in	375.0 mm 14.8 in	415.0 mm 16.3 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm 15.4 in	440.0 mm 17.3 in	480.0 mm 18.9 in
J SEAT ANGLE	73.6°	73.6°	73.6°
K CHAINSTAY	425.0 mm 16.7 in	425.0 mm 16.7 in	425.0 mm 16.7 in
L REACH	398.7 mm 15.7 in	422.3 mm 16.6 in	443.2 mm 17.4 in
M STACK	599.0 mm 23.6 in	603.6 mm 23.8 in	617.7 mm 24.3 in
N STEM LENGTH	60.0 mm 2.4 in	70.0 mm 2.8 in	80.0 mm 3.1 in
O TRAIL	83.9 mm 3.3 in	83.9 mm 3.3 in	83.9 mm 3.3 in

SCALE: 950, 970, 990

	S	M	L
A HEAD TUBE ANGLE	69.5°	69.5°	69.5°
B HEAD TUBE LENGTH	105.0 mm 4.1 in	105.0 mm 4.1 in	115.0 mm 4.5 in
C TOP TUBE HORIZONTAL	575.0 mm 22.6 in	600.0 mm 23.6 in	625.0 mm 24.6 in
D STANDOVER HEIGHT	750.5 mm 29.5 in	779.4 mm 30.7 in	791.0 mm 31.1 in
E BB OFFSET	-58.0 mm -2.3 in	-58.0 mm -2.3 in	-58.0 mm -2.3 in
F BB HEIGHT	315.5 mm 12.4 in	315.5 mm 12.4 in	315.5 mm 12.4 in
G WHEEL BASE	1,090.8 mm 42.9 in	1,115.8 mm 43.9 in	1,141.5 mm 44.9 in
H BB CENTER TO TOPTUBE CENTER	325.0 mm 12.8 in	375.0 mm 14.8 in	415.0 mm 16.3 in
I BB CENTER TO TOP OF SEATTUBE	395.0 mm 15.6 in	440.0 mm 17.3 in	480.0 mm 18.9 in
J SEAT ANGLE	73.6°	73.6°	73.6°
K CHAINSTAY	438.0 mm 17.2 in	438.0 mm 17.2 in	438.0 mm 17.2 in
L REACH	394.2 mm 15.5 in	419.2 mm 16.5 in	441.4 mm 17.4 in
M STACK	591.0 mm 23.3 in	591.0 mm 23.3 in	600.4 mm 23.6 in
N STEM LENGTH	60.0 mm 2.4 in	70.0 mm 2.8 in	80.0 mm 3.1 in
O TRAIL	85.2 mm 3.4 in	85.2 mm 3.4 in	85.2 mm 3.4 in

SCALE: 710 PLUS, 720 PLUS, 730 PLUS

	S	M	L
A HEAD TUBE ANGLE	66.5°	66.5°	66.5°
B HEAD TUBE LENGTH	100.0 mm 3.9 in	105.0 mm 4.1 in	115.0 mm 4.5 in
C TOP TUBE HORIZONTAL	577.0 mm 22.7 in	602.0 mm 23.7 in	627.0 mm 24.7 in
D STANDOVER HEIGHT	780.0 mm 30.7 in	806.0 mm 31.7 in	829.0 mm 32.6 in
E BB OFFSET	-55.0 mm -2.2 in	-55.0 mm -2.2 in	-55.0 mm -2.2 in
F BB HEIGHT	310.0 mm 12.2 in	310.0 mm 12.2 in	310.0 mm 12.2 in
G WHEEL BASE	1,108.0 mm 43.6 in	1,133.4 mm 44.6 in	1,159.3 mm 45.6 in
H BB CENTER TO TOPTUBE CENTER	328.0 mm 12.9 in	383.0 mm 15.1 in	425.0 mm 16.7 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm 15.4 in	440.0 mm 17.3 in	480.0 mm 18.9 in
J SEAT ANGLE	72.8°	72.8°	72.8°
K CHAINSTAY	439.0 mm 17.3 in	439.0 mm 17.3 in	439.0 mm 17.3 in
L REACH	389.0 mm 15.3 in	412.0 mm 16.2 in	435.0 mm 17.1 in
M STACK	607.0 mm 23.9 in	612.0 mm 24.1 in	621.0 mm 24.4 in
N STEM LENGTH	50.0 mm 2.0 in	60.0 mm 2.4 in	70.0 mm 2.8 in

BIG JON

	S	M	L
A HEAD TUBE ANGLE	69.0°	69.0°	69.0°
B HEAD TUBE LENGTH	105.0 mm 4.1 in	105.0 mm 4.1 in	115.0 mm 4.5 in
C TOP TUBE HORIZONTAL	575.0 mm 22.6 in	600.0 mm 23.6 in	625.0 mm 24.6 in
D STANDOVER HEIGHT	787.0 mm 31.0 in	811.0 mm 31.9 in	835.0 mm 32.9 in
E BB OFFSET	-60.0 mm -2.4 in	-60.0 mm -2.4 in	-60.0 mm -2.4 in
F BB HEIGHT	320.0 mm 12.6 in	320.0 mm 12.6 in	320.0 mm 12.6 in
G WHEEL BASE	1,106.0 mm 43.5 in	1,131.0 mm 44.5 in	1,157.0 mm 45.6 in
H BB CENTER TO TOPTUBE CENTER	320.0 mm 12.6 in	372.0 mm 14.6 in	414.0 mm 16.3 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm 15.4 in	440.0 mm 17.3 in	480.0 mm 18.9 in
J SEAT ANGLE	73.0°	73.0°	73.0°
K CHAINSTAY	465.0 mm 18.3 in	465.0 mm 18.3 in	465.0 mm 18.3 in
L REACH	385.0 mm 15.2 in	410.0 mm 16.1 in	432.0 mm 17.0 in
M STACK	619.0 mm 24.4 in	619.0 mm 24.4 in	629.0 mm 24.8 in
N STEM LENGTH	60.0 mm 2.4 in	60.0 mm 2.4 in	70.0 mm 2.8 in

SPARK 900 RC: SL, WORLD CUP, PRO, TEAM, COMP


	S	M	L
A HEAD TUBE ANGLE	68.5°	68.5°	68.5°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	95.0 mm 3.7 in	105.0 mm 4.1 in
C TOP TUBE HORIZONTAL	570.0 mm 22.4 in	600.0 mm 23.6 in	630.0 mm 24.8 in
D STANDOVER HEIGHT	739.0 mm 29.1 in	737.0 mm 29.0 in	756.0 mm 29.8 in
E BB OFFSET	-50.5 mm -2.0 in	-50.5 mm -2.0 in	-50.5 mm -2.0 in
F BB HEIGHT	319.5 mm 12.6 in	319.5 mm 12.6 in	319.5 mm 12.6 in
G WHEEL BASE	1,097.7 mm 43.2 in	1,127.7 mm 44.4 in	1,158.6 mm 45.6 in
H BB CENTER TO TOPTUBE CENTER	325.0 mm 12.8 in	375.0 mm 14.8 in	415.0 mm 16.3 in
I BB CENTER TO TOP OF SEATTUBE	410.0 mm 16.1 in	440.0 mm 17.3 in	490.0 mm 19.3 in
J SEAT ANGLE	73.8°	73.8°	73.8°
K CHAINSTAY	435.0 mm 17.1 in	435.0 mm 17.1 in	435.0 mm 17.1 in
L REACH	399.5 mm 15.7 in	429.5 mm 16.9 in	456.8 mm 18.0 in
M STACK	586.9 mm 23.1 in	586.9 mm 23.1 in	596.2 mm 23.5 in
N STEM LENGTH	60.0 mm 2.4 in	70.0 mm 2.8 in	80.0 mm 3.1 in
O TRAIL	90.9 mm 3.6 in	90.9 mm 3.6 in	90.9 mm 3.6 in

SPARK: 900 ULTIMATE, 900 PREMIUM, 920, 930, 940, 960, 970


	S	M	L
A HEAD TUBE ANGLE	67.2°	67.2°	67.2°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	95.0 mm 3.7 in	105.0 mm 4.1 in
C TOP TUBE HORIZONTAL	575.0 mm 22.6 in	605.0 mm 23.8 in	635.0 mm 25.0 in
D STANDOVER HEIGHT	738.0 mm 29.1 in	746.0 mm 29.4 in	760.0 mm 29.9 in
E BB OFFSET	-43.0 mm -1.7 in	-43.0 mm -1.7 in	-43.0 mm -1.7 in
F BB HEIGHT	327.0 mm 12.9 in	327.0 mm 12.9 in	327.0 mm 12.9 in
G WHEEL BASE	1,121.6 mm 44.2 in	1,151.6 mm 45.3 in	1,182.8 mm 46.6 in
H BB CENTER TO TOPTUBE CENTER	345.0 mm 13.6 in	375.0 mm 14.8 in	425.0 mm 16.7 in
I BB CENTER TO TOP OF SEATTUBE	410.0 mm 16.1 in	440.0 mm 17.3 in	490.0 mm 19.3 in
J SEAT ANGLE	73.8°	73.8°	73.8°
K CHAINSTAY	438.0 mm 17.2 in	438.0 mm 17.2 in	438.0 mm 17.2 in
L REACH	402.7 mm 15.9 in	432.7 mm 17.0 in	460.0 mm 18.1 in
M STACK	593.1 mm 23.4 in	593.1 mm 23.4 in	602.4 mm 23.7 in
N STEM LENGTH	50.0 mm 2.0 in	60.0 mm 2.4 in	70.0 mm 2.8 in
O TRAIL	100.2 mm 3.9 in	100.2 mm 3.9 in	100.2 mm 3.9 in

SPARK: 710 PLUS, 730 PLUS, 740 PLUS


	S	M	L
A HEAD TUBE ANGLE	66.9°	66.9°	66.9°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	95.0 mm 3.7 in	105.0 mm 4.1 in
C TOP TUBE HORIZONTAL	576.9 mm 22.7 in	607.0 mm 23.9 in	637.0 mm 25.1 in
D STANDOVER HEIGHT	741.0 mm 29.2 in	748.0 mm 29.4 in	762.0 mm 30.0 in
E BB OFFSET	-36.0 mm -1.4 in	-36.0 mm -1.4 in	-36.0 mm -1.4 in
F BB HEIGHT	329.0 mm 13.0 in	329.0 mm 13.0 in	329.0 mm 13.0 in
G WHEEL BASE	1,128.1 mm 44.4 in	1,158.1 mm 45.6 in	1,189.3 mm 46.8 in
H BB CENTER TO TOPTUBE CENTER	345.0 mm 13.6 in	375.0 mm 14.8 in	425.0 mm 16.7 in
I BB CENTER TO TOP OF SEATTUBE	410.0 mm 16.1 in	440.0 mm 17.3 in	490.0 mm 19.3 in
J SEAT ANGLE	73.2°	73.2°	73.2°
K CHAINSTAY	438.0 mm 17.2 in	438.0 mm 17.2 in	438.0 mm 17.2 in
L REACH	396.3 mm 15.6 in	426.4 mm 16.8 in	453.6 mm 17.9 in
M STACK	598.1 mm 23.5 in	598.1 mm 23.5 in	607.3 mm 23.9 in
N STEM LENGTH	50.0 mm 2.0 in	50.0 mm 2.0 in	60.0 mm 2.4 in

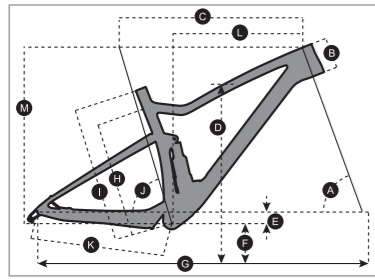


GENIUS

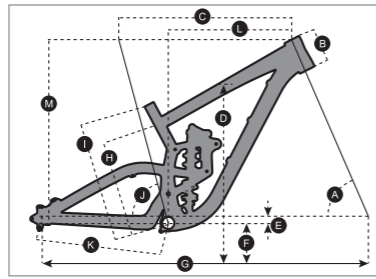

GAMBLER

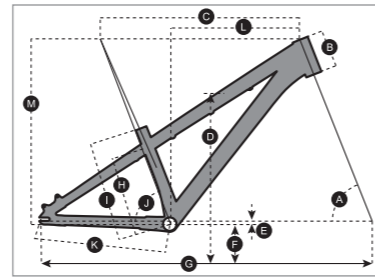

VOLTAGE YZ

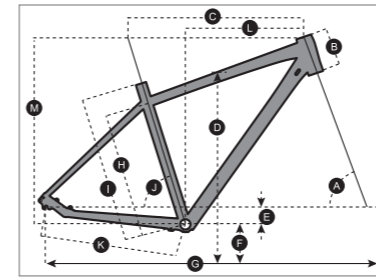

ASPECT

GENIUS: 700 TUNED PLUS, 710 PLUS, 720 PLUS, 730 PLUS, 740 PLUS, 750 PLUS

	S / 900		S / 700		M / 900		M / 700		L / 900		L / 700	
	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting	LOW BB Setting	HIGH BB Setting
A HEAD TUBE ANGLE	65.0°	65.6°	65.0°	65.6°	65.0°	65.6°	65.0°	65.6°	65.0°	65.6°	65.0°	65.6°
B HEAD TUBE LENGTH	95.0 mm 3.7 in	95.0 mm 3.7 in	95.0 mm 3.7 in	95.0 mm 3.7 in	110.0 mm 4.3 in	110.0 mm 4.3 in	110.0 mm 4.3 in	110.0 mm 4.3 in	110.0 mm 4.3 in	110.0 mm 4.3 in	110.0 mm 4.3 in	110.0 mm 4.3 in
C TOP TUBE HORIZONTAL	569.7 mm 22.4 in	568.2 mm 22.4 in	602.8 mm 23.7 in	601.2 mm 23.7 in	633.4 mm 24.9 in	631.8 mm 24.9 in	633.4 mm 24.9 in	631.8 mm 24.9 in	633.4 mm 24.9 in	631.8 mm 24.9 in	633.4 mm 24.9 in	631.8 mm 24.9 in
D STANDOVER HEIGHT												
E BB OFFSET	-27.4 mm -1.1 in	-20.0 mm -0.8 in	-27.5 mm -1.1 in	-20.0 mm -0.8 in	-27.6 mm -1.1 in	-20.0 mm -0.8 in	-27.6 mm -1.1 in	-20.0 mm -0.8 in	-27.6 mm -1.1 in	-20.0 mm -0.8 in	-27.6 mm -1.1 in	-20.0 mm -0.8 in
F BB HEIGHT	346.1 mm 13.6 in	340.0 mm 13.4 in	346.0 mm 13.6 in	340.0 mm 13.4 in	345.9 mm 13.6 in	340.0 mm 13.4 in	345.9 mm 13.6 in	340.0 mm 13.4 in	345.9 mm 13.6 in	340.0 mm 13.4 in	345.9 mm 13.6 in	340.0 mm 13.4 in
G WHEEL BASE	1,165.9 mm 45.9 in	1,164.6 mm 45.9 in	1,198.9 mm 47.2 in	1,197.6 mm 47.1 in	1,232.1 mm 48.5 in	1,230.8 mm 48.5 in	1,232.1 mm 48.5 in	1,230.8 mm 48.5 in	1,232.1 mm 48.5 in	1,230.8 mm 48.5 in	1,232.1 mm 48.5 in	1,230.8 mm 48.5 in
H BB CENTER TO TOPTUBE CENTER												
I BB CENTER TO TOP OF SEATTUBE	410.0 mm 16.1 in	410.0 mm 16.1 in	440.0 mm 17.3 in	440.0 mm 17.3 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in
J SEAT ANGLE	74.7°	75.3°	74.7°	75.3°	74.8°	75.3°	74.8°	75.3°	74.8°	75.3°	74.8°	75.3°
K CHAINSTAY	438.0 mm 17.2 in	436.0 mm 17.2 in	438.0 mm 17.2 in	436.0 mm 17.2 in	438.0 mm 17.2 in	436.0 mm 17.2 in	438.0 mm 17.2 in	436.0 mm 17.2 in	438.0 mm 17.2 in	436.0 mm 17.2 in	438.0 mm 17.2 in	436.0 mm 17.2 in
L REACH	405.9 mm 16.0 in	412.0 mm 16.2 in	439.1 mm 17.3 in	445.0 mm 17.5 in	466.1 mm 18.4 in	472.0 mm 18.6 in	466.1 mm 18.4 in	472.0 mm 18.6 in	466.1 mm 18.4 in	472.0 mm 18.6 in	466.1 mm 18.4 in	472.0 mm 18.6 in
M STACK	599.7 mm 23.6 in	595.5 mm 23.4 in	599.9 mm 23.6 in	595.5 mm 23.4 in	613.7 mm 24.2 in	609.2 mm 24.0 in	613.7 mm 24.2 in	609.2 mm 24.0 in	613.7 mm 24.2 in	609.2 mm 24.0 in	613.7 mm 24.2 in	609.2 mm 24.0 in
N STEM LENGTH	40.0 mm 1.6 in	40.0 mm 1.6 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in
O TRAIL	117.7 mm 4.6 in	107.3 mm 4.2 in	117.6 mm 4.6 in	107.3 mm 4.2 in	117.5 mm 4.6 in	107.3 mm 4.2 in	117.5 mm 4.6 in	107.3 mm 4.2 in	117.5 mm 4.6 in	107.3 mm 4.2 in	117.5 mm 4.6 in	107.3 mm 4.2 in

GAMBLER: 710, 720, 730

	S		M		L	
	LOW BB SETTING	HIGH BB SETTING	LOW BB SETTING	HIGH BB SETTING	LOW BB SETTING	HIGH BB SETTING
A HEAD TUBE ANGLE	63.0°	63.7°	63.0°	63.7°	63.0°	63.7°
B HEAD TUBE LENGTH	115.0 mm 4.5 in	115.0 mm 4.5 in	115.0 mm 4.5 in	115.0 mm 4.5 in	115.0 mm 4.5 in	115.0 mm 4.5 in
C TOP TUBE HORIZONTAL	549.7 mm 21.6 in	546.2 mm 21.5 in	595.4 mm 23.4 in	591.5 mm 23.3 in	633.6 mm 24.9 in	629.3 mm 24.8 in
D STANDOVER HEIGHT	778.6 mm 30.7 in	783.6 mm 30.9 in	771.6 mm 30.4 in	777.1 mm 30.6 in	765.3 mm 30.1 in	771.3 mm 30.4 in
E BB OFFSET	-13.0 mm -0.5 in	-3.0 mm -0.1 in	-13.0 mm -0.5 in	-3.0 mm -0.1 in	-13.0 mm -0.5 in	-3.0 mm -0.1 in
F BB HEIGHT	343.0 mm 13.5 in	353.0 mm 13.9 in	343.0 mm 13.5 in	353.0 mm 13.9 in	343.0 mm 13.5 in	353.0 mm 13.9 in
G WHEEL BASE	1,175.8 mm 46.3 in	1,172.5 mm 46.2 in	1,205.8 mm 47.5 in	1,202.5 mm 47.3 in	1,235.8 mm 48.7 in	1,232.5 mm 48.5 in
H BB CENTER TO TOPTUBE CENTER	336.0 mm 13.2 in	336.0 mm 13.2 in	333.0 mm 13.1 in	333.0 mm 13.1 in	331.0 mm 13.0 in	331.0 mm 13.0 in
I BB CENTER TO TOP OF SEATTUBE	406.0 mm 16.0 in	406.0 mm 16.0 in	404.0 mm 15.9 in	404.0 mm 15.9 in	403.0 mm 15.9 in	403.0 mm 15.9 in
J SEAT ANGLE	75.1°	75.9°	73.7°	74.6°	73.0°	73.9°
K CHAINSTAY	425.0 mm 16.7 in	421.5 mm 16.6 in	425.0 mm 16.7 in	421.5 mm 16.6 in	425.0 mm 16.7 in	421.5 mm 16.6 in
L REACH	385.0 mm 15.2 in	393.0 mm 15.5 in	415.0 mm 16.3 in	422.8 mm 16.6 in	445.0 mm 17.5 in	452.6 mm 17.8 in
M STACK	616.7 mm 24.3 in	611.7 mm 24.1 in	616.7 mm 24.3 in	611.4 mm 24.1 in	616.7 mm 24.3 in	611.2 mm 24.1 in
N STEM LENGTH	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in	50.0 mm 2.0 in

VOLTAGE YZ: 0.1


	ONE
A HEAD TUBE ANGLE	68.5°
B HEAD TUBE LENGTH	120.0 mm 4.7 in
C TOP TUBE HORIZONTAL	600.0 mm 23.6 in
D STANDOVER HEIGHT	702.0 mm 27.6 in
E BB OFFSET	-15.0 mm -0.6 in
F BB HEIGHT	324.0 mm 12.8 in
G WHEEL BASE	1,047.0 mm 41.2 in
H BB CENTER TO TOPTUBE CENTER	261.1 mm 10.3 in
I BB CENTER TO TOP OF SEATTUBE	315.0 mm 12.4 in
J SEAT ANGLE	71.0°
K CHAINSTAY	380.0 mm 15.0 in
L REACH	403.4 mm 15.9 in
M STACK	570.9 mm 22.5 in
N STEM LENGTH	40.0 mm 1.6 in

ASPECT: 900, 910, 920, 930, 950, 960, 980


	S		M		L	
	A HEAD TUBE ANGLE	69.5°	69.5°	69.5°	69.5°	69.5°
B HEAD TUBE LENGTH	105.0 mm 4.1 in	115.0 mm 4.5 in	125.0 mm 4.9 in	125.0 mm 4.9 in	125.0 mm 4.9 in	125.0 mm 4.9 in
C TOP TUBE HORIZONTAL	575.0 mm 22.6 in	585.0 mm 23.0 in	605.0 mm 23.8 in	605.0 mm 23.8 in	605.0 mm 23.8 in	605.0 mm 23.8 in
D STANDOVER HEIGHT	786.0 mm 30.9 in	817.0 mm 32.2 in	842.0 mm 33.1 in	842.0 mm 33.1 in	842.0 mm 33.1 in	842.0 mm 33.1 in
E BB OFFSET	-60.0 mm -2.4 in	-60.0 mm -2.4 in	-60.0 mm -2.4 in	-60.0 mm -2.4 in	-60.0 mm -2.4 in	-60.0 mm -2.4 in
F BB HEIGHT	316.0 mm 12.4 in	316.0 mm 12.4 in	316.0 mm 12.4 in	316.0 mm 12.4 in	316.0 mm 12.4 in	316.0 mm 12.4 in
G WHEEL BASE	1,083.0 mm 42.6 in	1,094.0 mm 43.1 in	1,114.0 mm 43.9 in	1,114.0 mm 43.9 in	1,114.0 mm 43.9 in	1,114.0 mm 43.9 in
H BB CENTER TO TOPTUBE CENTER	340.0 mm 13.4 in	385.0 mm 15.2 in	425.0 mm 16.7 in	425.0 mm 16.7 in	425.0 mm 16.7 in	425.0 mm 16.7 in
I BB CENTER TO TOP OF SEATTUBE	395.0 mm 15.6 in	440.0 mm 17.3 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in
J SEAT ANGLE	72.5°	72.5°	72.5°	72.5°	72.5°	72.5°
K CHAINSTAY	458.0 mm 18.0 in	458.0 mm 18.0 in	458.0 mm 18.0 in	458.0 mm 18.0 in	458.0 mm 18.0 in	458.0 mm 18.0 in
L REACH	381.0 mm 15.0 in	388.0 mm 15.3 in	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in
M STACK	451.1 mm 17.8 in	481.7 mm 19.0 in	506.8 mm 20.0 in	506.8 mm 20.0 in	506.8 mm 20.0 in	506.8 mm 20.0 in
N STEM LENGTH	70.0 mm 2.8 in	80.0 mm 3.1 in	90.0 mm 3.5 in	90.0 mm 3.5 in	90.0 mm 3.5 in	90.0 mm 3.5 in

ASPECT: 740, 750, 760, 780


	XS		S		M		L	
	A HEAD TUBE ANGLE	69.0°	69.0°	69.0°	69.0°	69.0°	69.0°	69.0°
B HEAD TUBE LENGTH	100.0 mm 3.9 in	100.0 mm 3.9 in	110.0 mm 4.3 in	110.0 mm 4.3 in	125.0 mm 4.9 in	125.0 mm 4.9 in	125.0 mm 4.9 in	
C TOP TUBE HORIZONTAL	555.0 mm 21.9 in	575.0 mm 22.6 in	585.0 mm 23.0 in	610.0 mm 24.0 in	610.0 mm 24.0 in	610.0 mm 24.0 in	610.0 mm 24.0 in	
D STANDOVER HEIGHT	720.5 mm 28.4 in	742.1 mm 29.2 in	769.5 mm 30.3 in	797.1 mm 31.4 in	797.1 mm 31.4 in	797.1 mm 31.4 in	797.1 mm 31.4 in	
E BB OFFSET	-44.0 mm -1.7 in	-44.0 mm -1.7 in	-44.0 mm -1.7 in	-44.0 mm -1.7 in	-44.0 mm -1.7 in	-44.0 mm -1.7 in	-44.0 mm -1.7 in	
F BB HEIGHT	312.5 mm 12.3 in	312.5 mm 12.3 in	312.5 mm 12.3 in	312.5 mm 12.3 in	312.5 mm 12.3 in	312.5 mm 12.3 in	312.5 mm 12.3 in	
G WHEEL BASE	1,063.0 mm 41.9 in	1,083.0 mm 42.6 in	1,094.0 mm 43.1 in	1,120.0 mm 44.1 in	1,120.0 mm 44.1 in	1,120.0 mm 44.1 in	1,120.0 mm 44.1 in	
H BB CENTER TO TOPTUBE CENTER								
I BB CENTER TO TOP OF SEATTUBE	355.0 mm 14.0 in	395.0 mm 15.6 in	440.0 mm 17.3 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	480.0 mm 18.9 in	
J SEAT ANGLE	73.0°	73.0°	73.0°	73.0°	73.0°	73.0°	73.0°	
K CHAINSTAY	435.0 mm 17.1 in	435.0 mm 17.1 in	435.0 mm 17.1 in	435.0 mm 17.1 in	435.0 mm 17.1 in	435.0 mm 17.1 in	435.0 mm 17.1 in	
L REACH	378.1 mm 14.9 in	398.0 mm 15.7 in	405.3 mm 16.0 in	426.0 mm 16.8 in	426.0 mm 16.8 in	426.0 mm 16.8 in	426.0 mm 16.8 in	
M STACK	578.6 mm 22.8 in	578.6 mm 22.8 in	587.9 mm 23.1 in	601.9 mm 23.7 in	601.9 mm 23.7 in	601.9 mm 23.7 in	601.9 mm 23.7 in	
N STEM LENGTH	60.0 mm 2.4 in	70.0 mm 2.8 in	80.0 mm 3.1 in	90.0 mm 3.5 in	90.0 mm 3.5 in	90.0 mm 3.5 in	90.0 mm 3.5 in	

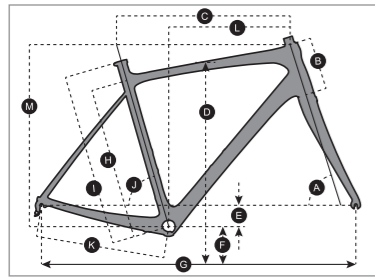


CONTESSA SOLACE

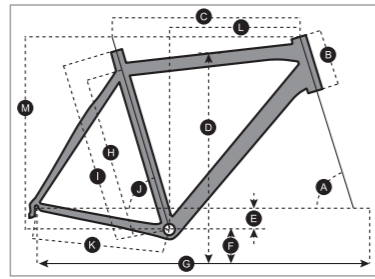

CONTESSA SPEEDSTER

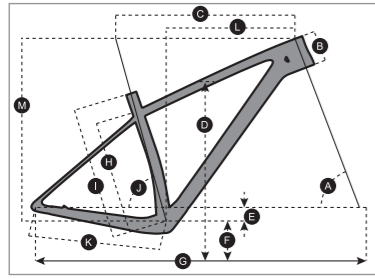

CONTESSA SCALE RC 900, 900

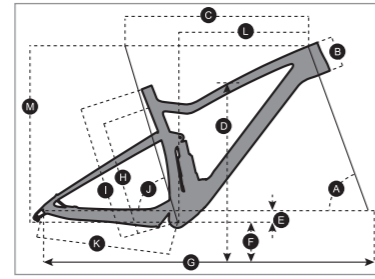

CONTESSA SPARK

CONTESSA SOLACE: 25.1, 35

	XXS/46	XS/48
A HEAD TUBE ANGLE	70.5°	71.0°
B HEAD TUBE LENGTH	125.0 mm 4.9 in	135.0 mm 5.3 in
C TOP TUBE HORIZONTAL	495.0 mm 19.5 in	505.0 mm 19.9 in
D STANDOVER HEIGHT	725.1 mm 28.5 in	740.8 mm 29.2 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	272.0 mm 10.7 in	272.0 mm 10.7 in
G WHEEL BASE	967.7 mm 38.1 in	970.8 mm 38.2 in
H BB CENTER TO TOPTUBE CENTER	400.0 mm 15.7 in	420.0 mm 16.5 in
I BB CENTER TO TOP OF SEATTUBE	460.0 mm 18.1 in	480.0 mm 18.9 in
J SEAT ANGLE	75.0°	75.0°
K CHAINSTAY	405.0 mm 15.9 in	405.0 mm 15.9 in
L REACH	354.0 mm 13.9 in	361.0 mm 14.2 in
M STACK	526.1 mm 20.7 in	537.4 mm 21.2 in
N STEM LENGTH	60.0 mm 2.4 in	70.0 mm 2.8 in

CONTESSA SPEEDSTER: 15, 25, 35, 45


	XXS/46	XS/48	S/51
A HEAD TUBE ANGLE	70.5°	71.0°	72.0°
B HEAD TUBE LENGTH	125.0 mm 4.9 in	135.0 mm 5.3 in	155.0 mm 6.1 in
C TOP TUBE HORIZONTAL	495.0 mm 19.5 in	505.0 mm 19.9 in	520.0 mm 20.5 in
D STANDOVER HEIGHT	725.1 mm 28.5 in	740.8 mm 29.2 in	767.4 mm 30.2 in
E BB OFFSET	-67.0 mm -2.6 in	-67.0 mm -2.6 in	-67.0 mm -2.6 in
F BB HEIGHT	272.0 mm 10.7 in	272.0 mm 10.7 in	272.0 mm 10.7 in
G WHEEL BASE	967.7 mm 38.1 in	970.8 mm 38.2 in	971.6 mm 38.3 in
H BB CENTER TO TOPTUBE CENTER	400.0 mm 15.7 in	420.0 mm 16.5 in	450.0 mm 17.7 in
I BB CENTER TO TOP OF SEATTUBE	460.0 mm 18.1 in	480.0 mm 18.9 in	510.0 mm 20.1 in
J SEAT ANGLE	75.0°	75.0°	74.5°
K CHAINSTAY	405.0 mm 15.9 in	405.0 mm 15.9 in	405.0 mm 15.9 in
L REACH	354.0 mm 13.9 in	361.0 mm 14.2 in	364.7 mm 14.4 in
M STACK	526.1 mm 20.7 in	537.4 mm 21.2 in	560.0 mm 22.0 in
N STEM LENGTH	60.0 mm 2.4 in	70.0 mm 2.8 in	90.0 mm 3.5 in

CONTESSA SCALE: RC 900, 900

	S
A HEAD TUBE ANGLE	69.5°
B HEAD TUBE LENGTH	95.0 mm 3.7 in
C TOP TUBE HORIZONTAL	575.0 mm 22.6 in
D STANDOVER HEIGHT	743.0 mm 29.3 in
E BB OFFSET	-58.0 mm -2.3 in
F BB HEIGHT	312.0 mm 12.3 in
G WHEEL BASE	1,076.4 mm 42.4 in
H BB CENTER TO TOPTUBE CENTER	325.0 mm 12.8 in
I BB CENTER TO TOP OF SEATTUBE	390.0 mm 15.4 in
J SEAT ANGLE	73.6°
K CHAINSTAY	425.0 mm 16.7 in
L REACH	398.7 mm 15.7 in
M STACK	599.0 mm 23.6 in
N STEM LENGTH	60.0 mm 2.4 in
O TRAIL	83.9 mm 3.3 in

CONTESSA SPARK: RC 900

	S
A HEAD TUBE ANGLE	68.5°
B HEAD TUBE LENGTH	95.0 mm 3.7 in
C TOP TUBE HORIZONTAL	570.0 mm 22.4 in
D STANDOVER HEIGHT	739.0 mm 29.1 in
E BB OFFSET	-50.5 mm -2.0 in
F BB HEIGHT	319.5 mm 12.6 in
G WHEEL BASE	1,097.7 mm 43.2 in
H BB CENTER TO TOPTUBE CENTER	410.0 mm 16.1 in
I BB CENTER TO TOP OF SEATTUBE	410.0 mm 16.1 in
J SEAT ANGLE	73.8°
K CHAINSTAY	435.0 mm 17.1 in
L REACH	399.5 mm 15.7 in
M STACK	586.9 mm 23.1 in
N STEM LENGTH	60.0 mm 2.4 in
O TRAIL	90.9 mm 3.6 in

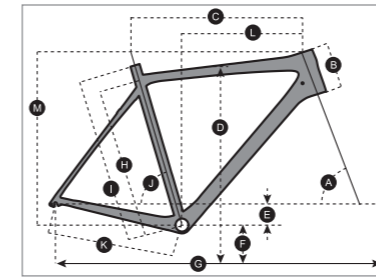

JUNIOR BIKES

SPEEDSTER JR: 24

	24"
A HEAD TUBE ANGLE	71.0°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	450.0 mm 17.7 in
D STANDOVER HEIGHT	
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	885.3 mm 34.9 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	345.0 mm 13.6 in
J SEAT ANGLE	73.5°
K CHAINSTAY	385.0 mm 15.2 in
L REACH	
M STACK	
N STEM LENGTH	60.0 mm 2.4 in
O TRAIL	

SCALE JR: 24 DISC, 24

	24"
A HEAD TUBE ANGLE	69.0°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	500.0 mm 19.7 in
D STANDOVER HEIGHT	584.8 mm 23.0 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	985.0 mm 38.8 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	310.0 mm 12.2 in
J SEAT ANGLE	68.0°
K CHAINSTAY	415.0 mm 16.3 in
L REACH	
M STACK	
N STEM LENGTH	50.0 mm 2.0 in
O TRAIL	

SCALE JR: 20

	20"
A HEAD TUBE ANGLE	69.0°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	450.0 mm 17.7 in
D STANDOVER HEIGHT	509.9 mm 20.1 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	892.1 mm 35.1 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	280.0 mm 11.0 in
J SEAT ANGLE	70.4°
K CHAINSTAY	370.0 mm 14.6 in
L REACH	
M STACK	
N STEM LENGTH	50.0 mm 2.0 in
O TRAIL	

CONTESSA JR: 24

	24"
A HEAD TUBE ANGLE	68.5°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	490.7 mm 19.3 in
D STANDOVER HEIGHT	583.0 mm 23.0 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	983.8 mm 38.7 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	260.0 mm 10.2 in
J SEAT ANGLE	72.0°
K CHAINSTAY	415.0 mm 16.3 in
L REACH	
M STACK	
N STEM LENGTH	50.0 mm 2.0 in
O TRAIL	

CONTESSA JR: 20

	20"
A HEAD TUBE ANGLE	68.5°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	435.0 mm 17.1 in
D STANDOVER HEIGHT	505.8 mm 19.9 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	862.0 mm 33.9 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	225.0 mm 8.9 in
J SEAT ANGLE	71.0°
K CHAINSTAY	367.0 mm 14.4 in
L REACH	
M STACK	
N STEM LENGTH	50.0 mm 2.0 in
O TRAIL	

VOLTAGE JR: 24 DISC, 24

	24"
A HEAD TUBE ANGLE	68.5°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	490.0 mm 19.3 in
D STANDOVER HEIGHT	610.0 mm 24.0 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	983.1 mm 38.7 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	280.0 mm 11.0 in
J SEAT ANGLE	68.6°
K CHAINSTAY	415.0 mm 16.3 in
L REACH	
M STACK	
N STEM LENGTH	50.0 mm 2.0 in
O TRAIL	

VOLTAGE JR: 20

	20"
A HEAD TUBE ANGLE	68.5°
B HEAD TUBE LENGTH	100.0 mm 3.9 in
C TOP TUBE HORIZONTAL	435.0 mm 17.1 in
D STANDOVER HEIGHT	538.0 mm 21.2 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	862.0 mm 33.9 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	245.0 mm 9.6 in
J SEAT ANGLE	68.6°
K CHAINSTAY	367.0 mm 14.4 in
L REACH	
M STACK	
N STEM LENGTH	50.0 mm 2.0 in
O TRAIL	

VOLTAGE JR: WALKER

	12"
A HEAD TUBE ANGLE	70.0°
B HEAD TUBE LENGTH	80.0 mm 3.1 in
C TOP TUBE HORIZONTAL	326.5 mm 12.9 in
D STANDOVER HEIGHT	283.0 mm 11.1 in
E BB OFFSET	
F BB HEIGHT	
G WHEEL BASE	588.8 mm 23.2 in
H BB CENTER TO TOPTUBE CENTER	
I BB CENTER TO TOP OF SEATTUBE	160.0 mm 6.3 in
J SEAT ANGLE	71.0°
K CHAINSTAY	242.0 mm 9.5 in
L REACH	
M STACK	
N STEM LENGTH	30.0 mm 1.2 in
O TRAIL	